

3. DUAL BASES IN CRYSTALLOGRAPHIC COMPUTING


coordinates and this coordinate system is generally a constant aspect of the problem.

In order to view these data in convenient ways such coordinates may be subjected to a 4×4 viewing transformation T , affecting orientation, scale *etc.*, the resulting coordinates \mathbf{TX} being then in display space. Here, and throughout what follows, we treat position vectors as columns with transformation matrices as factors on the left, though some writers do the reverse.

In general, only some portion of display space which lies inside a certain frustum of a pyramid is required to fall within the picture. The pyramid may be thought of as having the observer's eye at its vertex, with a rectangular base corresponding to the picture area. This volume is called a window. A transformation, U , which takes display-space coordinates as input and generates vectors (X, Y, Z, W) for which X/W and $Y/W = \pm 1$ for points on the left, right, top and bottom boundaries of the window and for which Z/W takes particular values on the front and back planes of the window, is said to be a windowing transformation. In machines for which Z/W controls intensity depth cueing, the range of Z/W corresponding to the window is likely to be 0 to 1 rather than -1 to 1. Coordinates obtained by multiplying display-space coordinates by U are termed picture-space coordinates. Mathematically, U is a 4×4 matrix like any other, but functionally it is special. Declaring a transformation to be a windowing transformation implies that only resulting points having $|X|, |Y| < W$ and positive $Z < W$ are to be plotted. Machines with clipping hardware to truncate lines which run out of the picture perform clipping on the output from the windowing transformation.

Finally, the picture has to be drawn in some rectangular portion of the screen which is allocated for the purpose. Such an area is termed a viewport and is defined in terms of screen coordinates which are defined absolutely for the hardware in question as $\pm n$ for full-screen deflection, where n is declared by the manufacturer. Screen coordinates are obtained from picture coordinates with a viewport transformation, V .*

To summarize, screen coordinates, S , are given by

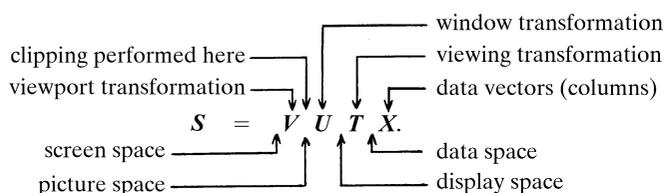

3.3.1.3.2. Translation

The transformation

$$\begin{pmatrix} NI & \mathbf{V} \\ \mathbf{0}^T & N \end{pmatrix} \begin{pmatrix} \mathbf{X} \\ W \end{pmatrix} = \begin{pmatrix} \mathbf{XN} + \mathbf{VW} \\ NW \end{pmatrix} \simeq \begin{pmatrix} \mathbf{X} + \mathbf{VW}/N \\ W \end{pmatrix} \simeq \begin{pmatrix} \mathbf{X}/W + \mathbf{V}/N \\ 1 \end{pmatrix}$$

evidently corresponds to the addition of the vector \mathbf{VW}/N to the components of \mathbf{X} or of \mathbf{V}/N to the components of \mathbf{X}/W . (I is the identity.) Displacements may thus be affected by expressing the required displacement vector in homogeneous coordinates with any suitable choice of N (commonly, $N = W$), with \mathbf{V} scaled to correspond to this choice, and loading the 4×4 transformation matrix as indicated above.

* In recent years it has become increasingly common, especially in two-dimensional work, to apply the term 'window' to what is here called a viewport, but in this chapter we use these terms in the manner described in the text.

3.3.1.3.3. Rotation

Rotation about the origin is achieved by

$$\begin{pmatrix} NR & \mathbf{0} \\ \mathbf{0}^T & N \end{pmatrix} \begin{pmatrix} \mathbf{X} \\ W \end{pmatrix} = \begin{pmatrix} NR\mathbf{X} \\ NW \end{pmatrix} \simeq \begin{pmatrix} R\mathbf{X} \\ W \end{pmatrix},$$

in which R is an orthogonal 3×3 matrix. R necessarily has elements not exceeding one in modulus. For machines using integer arithmetic, therefore, N would be chosen large enough (usually half the largest possible integer) for the product NR to be well represented in the available word length. Characteristically, N affects resolution but not scale.

3.3.1.3.4. Scale

The transformation

$$\begin{pmatrix} SNI & \mathbf{0} \\ \mathbf{0}^T & N \end{pmatrix} \begin{pmatrix} \mathbf{X} \\ W \end{pmatrix} = \begin{pmatrix} SN\mathbf{X} \\ NW \end{pmatrix} \simeq \begin{pmatrix} S\mathbf{X} \\ W \end{pmatrix}$$

scales the vector (\mathbf{X}, W) by the factor S . For integer working and $|S| < 1$, N should be set to the largest representable integer. For $|S| > 1$ the product SN should be the largest representable integer, N being reduced accordingly.

3.3.1.3.5. Windowing and perspective

It is necessary at this point to relate the discussion to the axial system inherent in the graphics device employed. One common system adopts X horizontal and to the right when viewing the screen, Y vertically upwards in the plane of the screen, and Z normal to X and Y with $+Z$ into the screen. This is, unfortunately, a left-handed system in that $(\mathbf{X} \times \mathbf{Y}) \cdot \mathbf{Z}$ is negative. Since it is usual in crystallographic work to use right-handed axial systems it is necessary to incorporate a matrix of the form

$$\begin{pmatrix} W & 0 & 0 & 0 \\ 0 & W & 0 & 0 \\ 0 & 0 & -W & 0 \\ 0 & 0 & 0 & W \end{pmatrix}$$

either as the left-most factor in the matrix T or as the right-most factor in the windowing transformation U (see Section 3.3.1.3.1). The latter choice is to be preferred and is adopted here. The former choice leads to complications if transformations in display space will be required. Display-space coordinates are necessarily referred to this axial system.

Let L, R, T, B, N and F be the left, right, top, bottom, near and far boundaries of the windowed volume ($L < R, T > B, N < F$), S be the Z coordinate of the screen, and C, D and E be the coordinates of the observer's eye position, all ten of these parameters being referred to the origin of display space as origin, which may be anywhere in relation to the hardware. L, R, T and B are to be evaluated in the screen plane. All ten parameters may be referred to their own fourth coordinate, V , meaning that the point (X, Y, Z, W) in display space will be on the left boundary of the picture if $X/W = L/V$ when $Z/W = S/V$. V may be freely chosen so that all eleven quantities and all elements of U suit the word length of the machine. These relationships are illustrated in Fig. 3.3.1.1.

Since

$$(X, Y, Z, W) \simeq \left(\frac{XV}{W}, \frac{YV}{W}, \frac{ZV}{W}, V \right),$$

XV/W is a display-space coordinate on the same scale as the window parameters. This must be plotted on the screen at an X coordinate (on the scale of the window parameters) which is the weighted mean of XV/W and C , the weights being $(S - E)$ and